





*Shown without dust hood.

Features:

- Aluminum grid table with spoil board
- Drill block with 9 drilling spindles
- FANUC 0*i*-F Plus control with 15" touchscreen
- 13.4 hp high-performance spindle
- Attached 16 position rotary tool changer
- Solid welded steel construction

Materials:



Wood







Composite

Plastic





FANUC








blueadvancedmachinery.com

828-346-8660



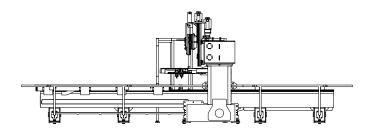


TABLE SIZE		
Х	97.5"	2477mm
Υ	49"	1245mm
Z-Stroke	16"	406mm
Z-Clearance	12"	305mm

OVERALL FOOTPRINT*				
L	235.25"	5975mm		
W	127.5"	3239mm		
н	79.5"	2019mm		
*Includes all sa	fety guard rails.			

Available Options:

- Multi-vacuum table with 8 independent zones
- Off-feed table with pusher bar
- 24 position tool changer

SPINDLE	
Max Spindle Power	13.4 hp air cooled
Max Spindle RPM	24,000
Rotation	CW & CCW
Tool Taper	HSK63F

MAX RAPID SPEEDSX axis60m/minY axis60m/minZ axis15m/min

TOOL CHANGER		
Туре	Attached rotary	
Position	16	

9

- Tool Touch Probe
- Tool blow-off
- Fanuc Servo drive w/ absolute encoder positioning

DRILL BLOCK

Vertical drilling spindles	
*others available	

DUST COLLECTION

Retractable Dust Cover

Vacuum Pump Options:

- Becker Dry Vane 250 VTLF 2.25 @ 169 SCFM
- Becker Dry Vane Twin 250 VTLF 2.25 @ 338 SCFM
- Dekker Oil Sealed 25hp 410 SCFM
- Dekker Oil Sealed 40hp 550 SCFM





blueadvancedmachinery.com

828-346-8660

info@blueadvancedmachinery.com

1808 Emmanuel Church Rd, Conover, NC 28613

© 2023 Blue Advanced Machinery. All Rights Reserved.

All information is correct at time of printing and is subject to change without notice. Please speak with a sales representative for more information.